



FROSTSUPPLY.COM
800-776-5444


Your Source for Caddy

NEW! Snap to Stud Products

Fast installation with Snap to stud feature
Self-leveling features ensures your box is always square

Snap to Stud Telescoping Screw Gun Bracket

Part Number	Stud Spacing	Box Depth	Standard Packing Quantity
TSGB1624S	15 3/4" - 25"	1 1/2"; 2 1/8"	50



Snap to Stud Electrical Box Bracket

Part Number	Stud Wall Depth	Box Size	Depth	Height	Width
STS2346	2 1/2"; 3 5/8"; 4", 6"	4", 4 11/16"	3 5/8"	7.45"	8 1/4"



NEW! Rod Lock Products

Caddy Rod Lock Coupler

- Joins two sections of threaded rod by an easy "push-to-install" mechanism
- Can be easily installed at the end of a threaded rod, or to any existing male thread

Part Number	Rod Size	Height	Static Load
CRLC37EG	3/8"	2.4"	1,000lb



Caddy Rod Lock Coupler with Rod

- Easily installs into any traditional rod attachment
- Allows simple installation of threaded rod assemblies by an easy "push-to-install" mechanism
- Prefabricated assemblies easily lift and lock into place

Part Number	Rod Size	Height	Static Load
CRLC37L1	3/8"	6.3"	1,000lb



Caddy Rod Lock Bar Joist Hanger

- Easily installs from underneath the bar joist
- Plastic protection cap prevents dirt or structural coatings from obstructing the "push to install" mechanism

Part Number	Rod Size	Height	Width	Static Load
CRLJ37EG	3/8"	7.4"	3.7"	1,000lb



Caddy Rod Lock Strut Nut

- Allows for the quick creation, installation, and adjustment of multi-level assemblies
- Integrated adjustment nut enable fine tuning the system height up or down
- Lock nut can be finger tightened, locking the rod in place

Part Number	Rod Size
*CRLSL37EG	3/8"



* indicates that the product is a non-stock item



Caddy Direct Fastening

Shot-Fire Products:


Drop Rods, J-Hooks, Conduit Clamps, Rod Hangers, Cable Systems

These products feature an integrated pin that installs to concrete, steel, or composite metal decking using powder actuated or single shot gas tools.

Caddy Cat HP J-Hook with Shot-Fire Bracket

- Provides optimal support for high-performance data cable
- Complete with shot-fire bracket and pre-assembled drive pin from Powers Fasteners, Inc.
- Rounded edges on J-Hooks provide proper bend radius support for high performance data cables

Part Number	Diameter	Cable Capacity, CAT6	Height	Static Load
CAT16HPSF	1"	15	4 3/4"	60lb
CAT21HPSF	1 5/16"	40	5 1/8"	60lb
CAT32HPSF	2"	60	5 1/2"	60lb
CAT48HPSF	3"	150	7 1/4"	60lb
CAT64HPSF	4"	220	8"	60lb



CAT48HPSF

Snap Close Conduit/Pipe with Shot-Fire Bracket

- Eliminates need for offset bending conduit
- Finger closure, no tools required

Part Number	Height	Width	Static Load	EMT Conduit Size
812MSF	2"	3 3/8"	25lb	1/2", 3/4"
16MSF	1 3/4"	4"	25lb	1"
812MZSF	3 7/8"	2 3/4"	100lb	1/2", 3/4"



16MSF

Bolt Close Conduit/Pipe Clamp with Shot-Fire Bracket

- Retained bolt and built-in nut means there are less parts to handle or drop
- Combo head bolt works with slotted, hex, #3 phillips, or #2 robertson drivers

Part Number	Height	Width	Static Load	EMT Conduit Size
CD0BSF	1 3/4"	3 3/8"	100lb	1/2"
CD1BSF	1 7/8"	3 3/4"	100lb	3/4"
CD2BSF	2"	3 7/8"	100lb	1"
*CD0BZSF	3 7/8"	2 3/4"	100lb	1/2"
*CD1BZSF	4 1/8"	3 1/8"	100lb	3/4"
*CD2BZSF	4 3/8"	3 1/8"	100lb	1"




CD1BSF

Drop Rod with Shot-Fire Bracket

- Quickly and easily attaches to concrete, steel, or composite metal decking
- Integrated pin installs easily using powder-actuated or single-shot gas actuated tools
- Works with most standard CADDY spring steel fasteners designed for rod attachments

Part Number	Rod Size	Length	Static Load	Rod Type
DR4SF12	1/4"	12"	95lb	Smooth
DR4SF24	1/4"	24"	95lb	Smooth
DR4SF36	1/4"	36"	95lb	Smooth
DR4SF48	1/4"	48"	95lb	Smooth
DR4TSF12	1/4"	12"	95lb	Threaded
DR4TSF24	1/4"	24"	95lb	Threaded
DR4TSF36	1/4"	36"	95lb	Threaded




DR4SF12

* indicates that the product is a non-stock item

Ask us about Caddy's New Seismic Cable Bracing Systems

The system can be used to brace electrical, mechanical, plumbing, and fire sprinkler applications.

- Code Compliant
- UL Listed
- Made in the USA

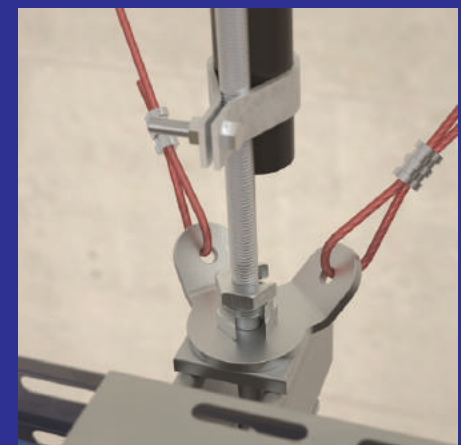

Thread Install Rod Hanger with Shot-Fire Bracket

- Suspends threaded rod without the need for additional hardware
- Integrated pin installs easily using powder-actuated or single-shot gas actuated tools

Part Number	Rod Size	Height	Width	Static Load
4TIBSF	1/4"	2.35"	2.31"	100lb
6TIBSF	3/8"	2.35"	2.31"	100lb



4TIBSF

MC/AC Cable Clip with Shot-Fire Bracket

- Provides easy snap-in installation of up two MC/AC cables
- Complete with shot-fire bracket and pre-assembled drive pin from Powers Fasteners, Inc.
- Quickly and easily attaches to concrete, steel, or composite metal decking
- Integrated pin installs easily using powder-actuated or single-shot gas actuated tools

Part Number	Height	Width	MC/AC Cable Size
MAC2SF	2 7/8"	2 3/16"	14-2 to 10-3



MAC2SF

Angle Bracket with Shot-Fire Bracket

- Provides an attachment point for Caddy Speed Link assemblies, wire, S-hooks, or chain

Part Number	Height	Width	Static Load
ABSF	1 11/16"	1.48"	100LB




ABSF

Caddy Cablecat J-Hook with Shot-Fire Basket

- Cost effective alternative to expensive cable tray
- Galvanized finished on J-Hooks provide smoother cable pull and greater corrosion resistance

Part Number	Diameter	Height
CAT12SF	3/4"	4 1/16"



CAT12SF

Wire Basket Support Clips

- Allows wire basket to be suspended from threaded rod without strut
- Spring steel clip installs easily without tools and holds the basket tray securely

WBS2-Angle Clip

Hole Size	0.54"
Basket Size	1"-1 1/4"
Diameter	0.14" - 0.24"
Static Load	120lb

WBS37-Clip with Nut

Hole Size	3/8"
Basket Size	1"-1 1/4"
Diameter	0.14" - 0.24"
Static Load	120lb

WBSH25-Side Mount

Hole Size	1/4"
Basket Size	1"-1 1/4"
Diameter	0.14" - 0.24"
Static Load	120lb

* indicates that the product is a non-stock item

WBS1-Retrofit Clip

Hole Size	0.4"
Basket Size	1"-1 1/4"
Diameter	0.14" - 0.24"
Static Load	120lb

* WBS37RL-Clip with RodNuck

Hole Size	3/8"
Basket Size	1"-1 1/4"
Diameter	0.14" - 0.24"
Static Load	120lb



WBS1-Retrofit



WBS2-Angle

Caddy All-In-One Solutions

All-In-One assemblies combine the electrical box, support bracket, mud ring, far-side support and ground wire pigtail into a single solution that is ready to use right out of the box. The system provides the contractor with the flexibility to wire from the front or the back of the assembly.

- Complete assembly that is ready to use right out of the box and installs with just two screws.
- Open-back design offers faster and easier access to install conduit connectors or wiring

Electrical Assemblies

*A1BF1G

Single Gang w/ Mud Ring

A1BF0G


Single Gang w/o Mud Ring



A1BF1G

*A1BF2G

Double gang w/ Mud Ring



A1BF2G

Electrical and Data Assemblies

- Comes with multiple boxes pre-assembled for side by side power and data applications

	Power Gang	Box Volume	Data Gang	Box Volume
--	------------	------------	-----------	------------

*A1BF1G41NAO Single 32.8in³ Single Ring Only

*A1BF1G51N Single 32.8in³ Single 64in³

*A1BF2G51N Double 32.8in³ Single 64in³



A1BF2G51N

Adapter Plate

- Supports 4-11/16" box to Caddy All-In-One Between-Stud Bracket
- Allows 4" mud ring to be attached to a 4-11/16" Box

Part Number

*TBSBA4

