

GenSPEED® 10 MTP Category 6A Cable

Features And Benefits

- 10 MTP™ unshielded-twisted pair (UTP) design performs like a shielded or foiled-twisted pair (STP/FTP) cable, providing industry-leading protection from external cable noise sources, also known as alien crosstalk (PSANEXT and PSAACRF)
- Mosaic Crossblock™ is a thin tape made up of individual metallic blocks separated by an insulating layer. Since there is no metal-to-metal contact, there is no path for current to flow longitudinally, and thus, no need for grounding
- The Flex-Separator™ optimizes internal pair geometry to yield superior electrical performance and maintain flexibility. This unique cross-web stabilizes each pair to create a smaller, **round** cable profile

Applications

- IEEE 802.3 10G Base-T, 100 Base-T
- 100 Base-TX, 10 Base-T, 1000 Base-TX
- 155 Mb/s ATM
- IEEE 802.3af for PoE
- Draft IEEE 802.3at for PoE Plus
- ANSI X3.263 100Mb/s

Standard Compliances

- ANSI/TIA 568 B.2-10
- RoHS Compliant Directive 2002/95/EC
- UL 444



featuring



Data subject to change without notice.



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- Cross-Web

Jacket











- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.295	0.290
Nominal Cable Weight (lbs/1000ft)	35	44
Minimum Bend Radius (in)	1.25	1.25
Maximum Pulling Force (lbs)	40	40
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Reel


Jacket Color	Reel	
	CMR (Riser)	CMP (Plenum)
 Blue	7133849	7131849
 White	7133850	7131850
 Gray	7133851	7131851
 Yellow	7133852	7131852
 Green	7133853	7131853
 Red	7133854	7131854
 Purple	7133855	7131855
 Orange	7133856	7131856
 Pink	7133857	7131857
 Black	7133858	7131858

An Unshielded 6A Cable That Performs Like a Shielded Cable

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR (min)		ACR (min)		Attenuation (min)		PSNEXT (min)		NEXT (min)		PSELFEXT (min)		ELFEXT (min)		Return Loss (min)		TCL (min)		PSANEXT (min)		PSAACRF (min)			
	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	TIA 568 B.2-10	General Cable Guaranteed	General Cable Typical	TIA 568 B.2-10	General Cable Guaranteed	General Cable Typical		
1	70.2	72.2	2.1	72.3	74.3	64.6	67.8	20.0	40.0	67.0	73.0	79.0	67.0	73.0	79.0	67.0	73.0	79.0	67.0	73.0	79.0	67.0	73.0	79.0
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	73.0	79.0	66.2	72.2	78.2	66.2	72.2	78.2	66.2	72.2	78.2	66.2	72.2	78.2
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	73.0	79.0	58.2	64.2	70.2	58.2	64.2	70.2	58.2	64.2	70.2	58.2	64.2	70.2
16	46.8	48.8	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	73.0	79.0	54.1	60.1	66.1	54.1	60.1	66.1	54.1	60.1	66.1	54.1	60.1	66.1
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	73.0	79.0	52.2	58.2	64.2	52.2	58.2	64.2	52.2	58.2	64.2	52.2	58.2	64.2
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	73.0	79.0	48.3	54.3	60.3	48.3	54.3	60.3	48.3	54.3	60.3	48.3	54.3	60.3
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	71.6	77.6	42.3	48.3	54.3	42.3	48.3	54.3	42.3	48.3	54.3	42.3	48.3	54.3
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	68.5	74.5	38.2	44.2	50.2	38.2	44.2	50.2	38.2	44.2	50.2	38.2	44.2	50.2
150	16.0	18.0	23.7	39.7	41.7	21.3	24.3	18.9	28.2	59.9	65.9	71.9	34.7	40.7	46.7	34.7	40.7	46.7	34.7	40.7	46.7	34.7	40.7	46.7
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	64.0	70.0	32.2	38.2	44.2	32.2	38.2	44.2	32.2	38.2	44.2	32.2	38.2	44.2
250	5.3	7.3	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	62.5	68.5	30.2	36.2	42.2	30.2	36.2	42.2	30.2	36.2	42.2	30.2	36.2	42.2
300	0.9	2.9	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	61.3	67.3	28.7	34.7	40.7	28.7	34.7	40.7	28.7	34.7	40.7	28.7	34.7	40.7
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	59.5	65.5	26.2	32.2	38.2	26.2	32.2	38.2	26.2	32.2	38.2	26.2	32.2	38.2
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	58.0	64.0	24.2	30.2	36.2	24.2	30.2	36.2	24.2	30.2	36.2	24.2	30.2	36.2

TYPICAL GenSPEED® 10 MTP™ CATEGORY 6A CROSS-SECTION

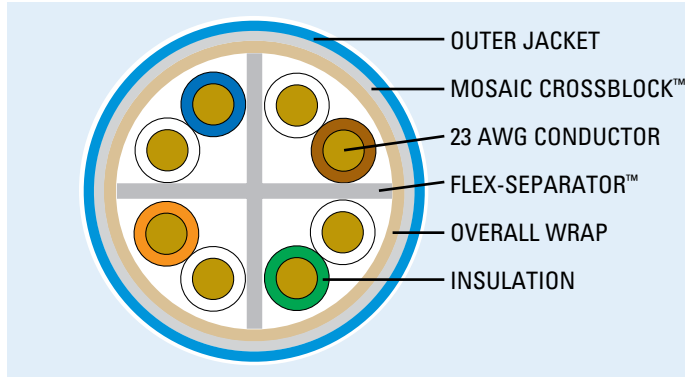


ELECTRICAL CHARACTERISTICS


DC Resistance (max) Ohms/100m (328ft) @ 20°C	9.38 ohms/100m
DC Resistance Unbalanced (max) Individual Pair %	4%
Delay Skew (max) ns/100m	35 ns/100m
Nom. Velocity of Propagation % Speed of Light	70%
Characteristic Impedance Frequency (f): 1-500 MHz	100 ohms ± 15 ohms

4 PAIR CABLES: Bundles of 7 Test Results


Six-around-one
configuration



PSANEXT

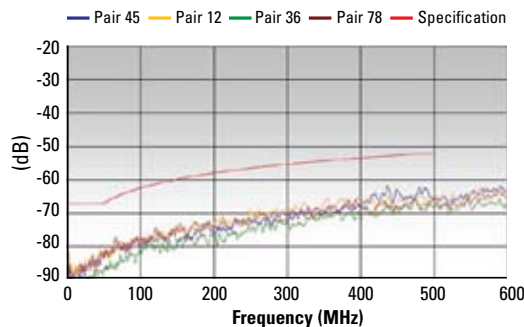

PSAACRF

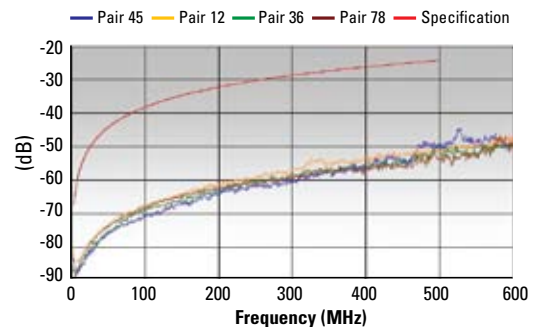

4 Tessenner Drive
Highland Heights, Kentucky 41076-9753
Telephone: (800) 424-5666
(859) 572-8000
Email: info@generalcable.com
www.generalcable.com

590 Barmac Drive
North York, Ontario M9L2X8
Telephone: (800) 561-0649
Fax: (800) 565-2529

GENERAL CABLE, FLEX-SEPARATOR, GENSPEED, MOSAIC CROSSBLOCK and 10 MTP are trademarks of General Cable Technologies Corporation.
©2009, General Cable Technologies Corporation, Highland Heights, KY 41076
All rights reserved. Printed in USA.
Form No. DAT-0129-0309
35919